


GEAR DRIVEN ROTARY TILLER

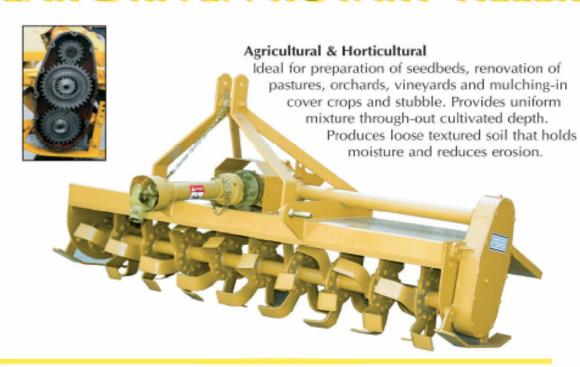

Features

- Gear Driven
- Rugged Construction for Long Life
- Strong, Balanced Rotor Shaft
- Large Bearings with Protective Seals
- Oversize Shafts and Gears
- Extra Strong A-Frame with Back Braces
- Heat Treated, Long Wearing Tines
- 6-L Shaped Tines Per Flange
- Well-Balanced to Eliminate Vibration
- Adjustable Skids for Depth Control
- D Connects to 3-Point, Cat. 1, 540 RPM Tractors
- Accommodates Category 1 Quick Hitch
- Torque Tube Frame to Absorb Shock Loads
- Frame Welded for Strength, Not Bolted
- Driveshaft with Slip Clutch

"TG" Series Rotary Tillers Tilling No. of Approx. Model No. Width Tines HP WT. TG-G-48-C 48" 20-35 600# 36 TG-G-60-C 60" 42 25-40 690# TG-G-72-C 72" 54 35-50 780#

Distributed by ~ J.S. Woodhouse Co., Inc., P.O. Box 1169, West Springfield, MA 01090 tel. 413.736.5462 fax. 413.732.3786

email: info@jswoodhouse.com www.jswoodhouse.com