

COMPACT LOADERS & ATTACHMENTS

PRODUCT RANGE



PM-000237 | 21v1



WWW.KANGALoader.COM



KANGA NORTH AMERICA
INFOUS@KANGALoader.COM
DYERSVILLE, IOWA



833 30 KANGA

WWW.KANGALoader.COM

ATTACHMENTS



4IN1 BUCKETS

Standard, Heavy Duty models



TRENCHERS

Standard, KTR models



ROTARY TILLER



POWER HEADS



AUGER BITS

4-36" Diameters,
Extensions available



CARRY-ALL LEVELLER


PLUS VARIOUS OTHER ATTACHMENTS

Mulch buckets, Rubble buckets, Grapple buckets, Front hoes, hoe buckets, Rock grab, Mixer bowls, Lawn aerator, Rotating log grab, Mini soil conditioner, Multi-tool carrier for Pallet forks or Tow hitch, and more.


ENGINEERED TO PERFORM WITH MINIMAL MAINTENANCE BUILT TO LAST

- ✔ Kanga's compact wheel hub design has zero overhang. Unlike competing brands, the wheel load is placed directly over the bearings, ensuring a longer service life.
- ✔ The zero overhang also helps protect against seal damage from stringy weeds, stringy bark, mulch, and other entanglement, preventing unnecessary maintenance and premature seal failures.
- ✔ Our wheel motors are simple to service and replace.

COMPETITOR WHEEL HUB

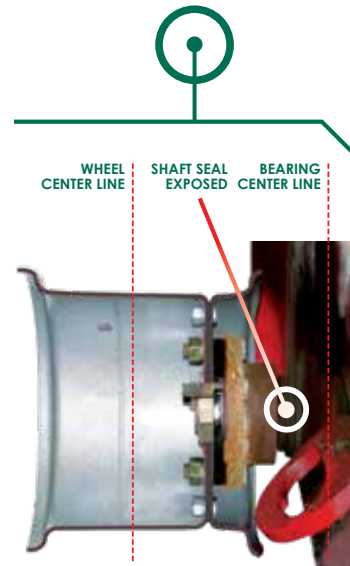

KANGA WHEEL HUB

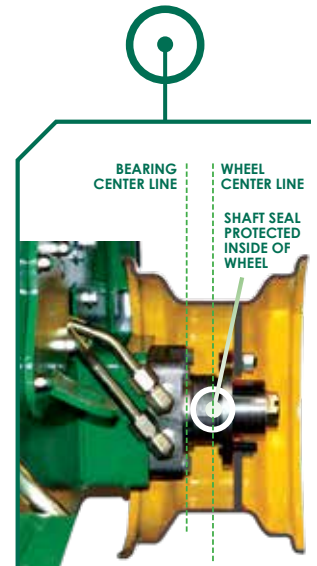

2 SERIES

GAS - TRACK/WHEEL



PERFORMANCE	WHEELED	TRACKED
	KK216V	TK216V
Tipping load (no bucket)	742 lbs	729 lbs
Rated operating capacity (ROC)* (no bucket)	371 lbs	328 lbs
Travel speed	3.4 mph	
Fuel capacity	1.85 gal	
Fuel type	Gas	
Machine operating mass (no operator/bucket)	979 lbs	1041 lbs
ENGINE		
Manufacturer	Vanguard 305777	
Power rating	29 cu.in	
HYDRAULICS		
Pump output	6.3 gpm	
Coupler type	Flat face	
Hydraulic tank capacity	13.6 gal	
KANGA ATTACHMENTS		
Attachment mount	Kanga 2 series	
Standard bucket capacity (heaped/struck vol.) ³	2.72 cu ft / 2.08 cu ft	
4in1 bucket capacity (heaped/struck vol.) ³	2.97 cu ft / 2.23 cu ft	
DIMENSIONS		
Height to hinge pin	46.3"	46.7"
Overall height	47.2"	47.6"
Overall length with bucket	81.5"	
Overall wheel / track width	30.3"	32.3"
Ground clearance	5.9"	6.3"

*Tipping load and Rated Operating Capacity (ROC) have been determined to ISO 14397-1. This is to represent general loader capabilities, and cannot be used for material load without adjusting for the specific attachment.

6 & 7 SERIES

GAS/DIESEL - TRACK/WHEEL



PERFORMANCE	WHEELED		TRACKED	
	PW628	DW625	PT728	DT725
Tipping load (no bucket)	955 lbs	1054 lbs	947 lbs	1018 lbs
Rated operating capacity (ROC)* (no bucket)	478 lbs	527 lbs	426 lbs	458 lbs
Travel speed	4.3 mph	4.3 mph	4.3 mph	4.3 mph
Fuel capacity	11.8 gal	13.2 gal	11.8 gal	13.2 gal
Fuel type	Gas	Diesel	Gas	Diesel
Machine operating mass (no operator/bucket)	1965 lbs	2130 lbs	1899 lbs	2075 lbs
ENGINE				
Manufacturer	Honda GX690	Kubota D902	Honda GX690	Kubota D902
Power rating	42 cu.in	23.5hp	42 cu.in	23.5hp
HYDRAULICS				
Pump output			10.75 gpm	
Coupler type			Flat face	
Hydraulic tank capacity			17.4 gal	
KANGA ATTACHMENTS				
Attachment mount	Universal mini mount compatible			
DIMENSIONS				
Height to hinge pin	73.4"		73.6"	
Overall height	53.9"		53.5"	
Overall length with bucket			86.6"	
Overall wheel / track width	40.6"		40.9"	
Ground clearance	7.3"		7.7"	

ENGINE WARRANTY

Kanga compact loader engines are covered under the applicable engine manufacturer's warranty - Briggs & Stratton, Honda, and Kubota respectively.

8 SERIES

DIESEL - TRACK/WHEEL



PERFORMANCE	WHEELED	TRACKED
	DW825	DT825
Tipping load (no bucket)	1182 lbs	1210 lbs
Rated operating capacity (ROC)* (no bucket)	591 lbs	544 lbs
Travel speed - default mode (and fast mode)	4.3 mph	3.4 mph (5.8 mph)
Fuel capacity	10.5 gal	
Fuel type	Diesel	
Machine operating mass (no operator/bucket)	2089 lbs	2203 lbs
ENGINE		
Manufacturer	Kubota D902	
Power rating	23.5 hp	
HYDRAULICS		
Pump output	10.75 gpm	
Coupler type	Flat face	
Hydraulic tank capacity	24.3 gal	
KANGA ATTACHMENTS		
Attachment mount	Universal mini mount compatible	
DIMENSIONS		
Height to hinge pin	79.7"	79.9"
Overall height	55.1"	55.4"
Overall length with bucket	87.8"	
Overall wheel / track width	40.7"	41.1"
Ground clearance	7.6"	



COMMERCIAL PRODUCT WARRANTY

5 YEARS
Chassis structural faults
2 YEARS/1000 HOURS
Arm/fit assembly workmanship
and structural faults

1 YEAR
Other components & electrical
Warranty Conditions Apply

REMOTE SERIES

DIESEL - TRACK/WHEEL



PERFORMANCE	WHEELED	TRACKED
	WR825	TR825
Tipping load (no bucket)	1322 lbs	
Rated operating capacity (ROC)* (no bucket)	595 lbs	
Travel speed - default mode (and fast mode)	6 mph	3.4 mph (5.8 mph)
Fuel capacity	10 gal	
Fuel type	Diesel	
Machine operating mass (no bucket)	2271 lbs	2491 lbs
ENGINE		
Manufacturer	Kubota D902	
Power rating	23.5 hp	
HYDRAULICS		
Pump output	10.73 gpm	
Coupler type	Flat face	
Hydraulic tank capacity	21.1 gal	
KANGA ATTACHMENTS		
Attachment mount	Universal mini mount compatible	
HD 4in1 bucket capacity (heaped/struck vol.) ³	4.59 cu ft / 3.36 cu ft	
DIMENSIONS		
Height to hinge pin	65.6"	
Overall height	40"	
Overall length with bucket	91"	
Overall wheel / track width	41"	
Ground clearance	7.6"	

THE KANGA DIFFERENCE

SELF-LEVELLING BUCKET WITH GENEROUS ROLLBACK

Self-leveling helps to maximize bucket capacity, and reduce spillage while raising and lowering of the boom. This ensures safer, faster, and easier operation of the bucket.

ERGONOMIC HAND CONTROLS

Raised controls reduce operator reach and fatigue, while the responsive soft-touch controls offer improved controlled steering, and attachment operation. The layout of the controls allows the operator to access every machine function without having to let go of the handlebars, making the Kanga one of the safest machines on the market.

AUTOMATIC AUXILIARY CUT-OFF

Hydraulics to the attachment stop when the operator steps off the drive platform, eliminating the risk of an operator getting entangled in the attachment.

GROUND CLEARANCE & DEPARTURE ANGLE

The Kanga Loader can fill and carry a bucket with the loader arms resting against the chassis, reducing force on cylinders, arms, pins, and bushes, optimizing stability and safe transportation - all with limited spillage. Generous bucket rollback and high ground clearance allows obstacles and uneven terrain to be navigated without the need to lift the bucket, to increase operator safety.



1978



The original idea which led to the world's first stand-on machine, was originally a motorised wheelbarrow.

1980



By 1980, the concept developed into a walk-behind machine with similar design and styling characteristics, found on modern machines.

1981



The first stand-on machine was introduced to the world. Named the Riga'1 Universal Loader. It was powered by an 11hp motor.

1984



The loaders were renamed the Jaden Loader. A larger sized model was released, named the Dingo 1000.

1985



The Jaden Maxi prototype was powered by a 16hp Engine. Only 35 were ever made.

1986



Mk1 - A major chassis design revision was undertaken to increase power and improve poise & balance.

1988



Long range fuel tanks were added over the wheels. Power was increased to 16hp.

1989



3 Series - Optional 10" wheels, larger fuel tanks (which encapsulate the operator), and the iconic green colour were introduced. Received 'Australian International Design' Award.

1996



4 Series - First model with 10" wheels as standard. Petrol and Diesel model options became available.

1997



Kanga begins exports to North America and New Zealand.

1999



The 5 Series model saw an introduction to soft-touch controls, auxiliary cutout, and redesigned fuel tanks, in preparation for the introduction of tracks.

2000



The 2 Series was released, to align with the original concept of a tight access and affordable earthmoving solution.

2002



The Kid track mini loader was released, as the smallest tracked machine in the world.

2004



6 & 7 Series mini loaders were released. Originally named the Big Foot, due to its 12" wheels, available in a 24hp petrol, or 20hp Diesel engine. The Track machine was named Fat Track.

2006



A new 25hp 2-speed 8 Series loader, featuring an oil cooler, trenching valve, and auto quick-hitch release - The largest and most powerful in the range.

2007



6 & 7 Series upgraded to 4-wheel motors, a wider platform, and an increase of performance and comfort. Received 'Innovative Product of the Year' Award.

2008



Remote Loader commences development, and first prototype released.

2009



Kanga Loaders was acquired by Digga Australia. The manufacturing of loaders was moved into the Digga factory.

2010



The Kanga Warrior was released. A cost effective bare-bones model for the weekend warrior.

2011



The Kanga Remote Loader was released, with wheeled and track versions available.

2013



The Kanga 8 Series range, featuring a 25hp diesel motor, was released. Available in wheeled and tracked versions.

2015



Kanga release the Kanga Klean program as an industry-first in emissions reduction.

2016



Kanga release the DT835 as the most powerful Kanga mini loader.

2017



Kanga Loaders launches in North America - USA.

2021



Kanga Loaders celebrates its 40th year anniversary.



INNOVATING SINCE 1981
THE WORLD'S FIRST MINI LOADER