

FERRI®



MHD

FRONT AND REAR UNIVERSAL SHREDDERS

- Professional green maintenance
- Agriculture



Revolving upper 3 point linkage for front and rear mounting.



Gearbox prearranged for rear (clockwise rotation) and front (underclockwise rotation) mounting.




Side shift linkage with hydraulic cylinder of 450 mm for all models.



Rear roller adjustable in 6 different positions.



Belts tightener with screw for belts tensioning.

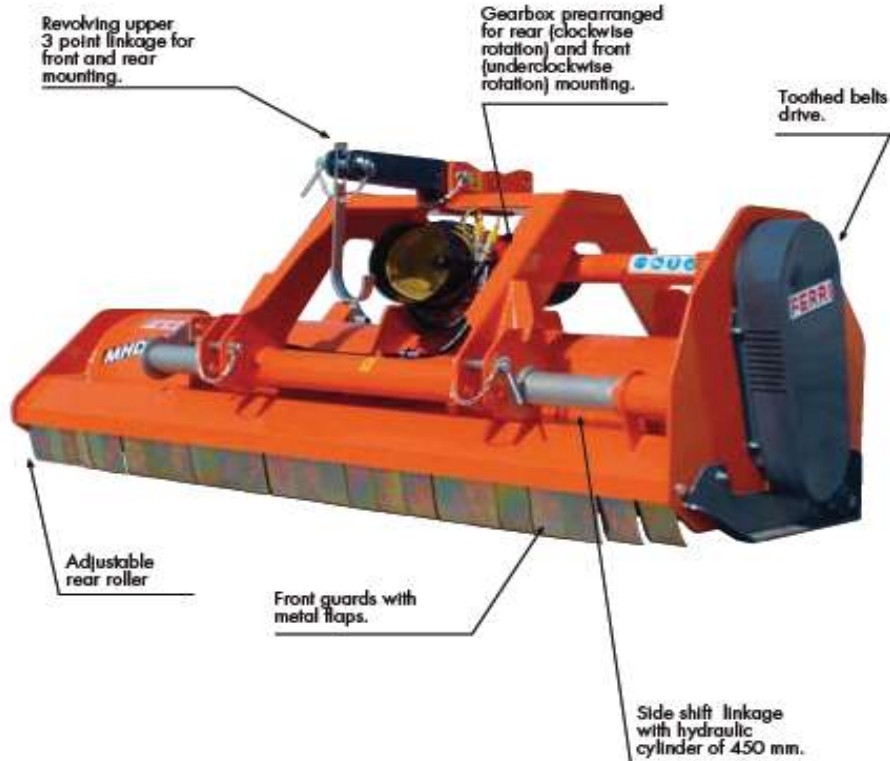

Working positions (m)

Model	Front Position (m)	Rear Position (m)
MHD 230	1,10	1,10
MHD 250	1,20	1,20
MHD 280	1,30	1,30
MHD 300	1,40	1,40

Distributed by: J. S. Woodhouse Co., Inc.
1314 Union St
West Springfield, MA 01089

Phone: 413-739-5607
Fax: 413-732-3786
email: info@jswoodhouse.com
website: www.jswoodhouse.com



FRONT AND REAR UNIVERSAL SHREDDERS
 • Professional green maintenance • Agriculture



Technical data

Model	Width of cut	Total width	Weight	Side shift	Tractors	Pto	Rotor	Blade tip speed
	m	m	Kg	m	HP min/max	Rpm	Rpm	m/sec
MHD 230	2,36	2,55	835	0,45	70/130	1000*	2000*	52*
MHD 250	2,56	2,75	880	0,45	75/130	1000*	2000*	52*
MHD 280	2,76	2,95	930	0,45	80/130	1000*	2000*	52*
MHD 300	2,96	3,15	970	0,45	90/130	1000*	2000*	52*

(* On request Pto 540 Rpm, rotor 1900 Rpm, blade tip speed 50 m/sec.

Machines

Model	No of flails
MHD 230	A 22 hammer blades
	B 66 multuse flails
	C 44 articulated "Y" + 22 straight flails
MHD 250	A 24 hammer blades
	B 72 multuse flails
MHD 280	A 26 hammer blades
	B 78 multuse flails
MHD 300	A 28 hammer blades
	B 84 multuse flails



Front version

Features

- Revolving upper 3 point linkage for front and rear mounting.
- Gearbox prearranged for rear (clockwise rotation) and front (underclockwise rotation) mounting.
- Side shift linkage with hydraulic cylinder of 450 mm.
- Toothed belts drive (4 belts SPB).
- Belts tightener with screw for belts tension.
- Adjustable skid under the gearbox.
- Rotor Ø 194 mm.
- 4 rows of fixed static serrated blades.
- Adjustable rear roller Ø 168 mm.
- Front guards with metal flaps and rear abrasion resistant guards
- Pto shaft

Flails

Interchangeable on same rotor

Forged hammer-blades for: woods, twigs, grass
 Ø 5 cm max.



Code MH.450415

A

Multuse flails for grass, bushes, shrubs, sticks, wood
 Ø 4 cm max.



Code MH.450414

B

Specific rotor

Articulated and straight flails for grass, sticks, shrubs
 Ø max 2,5 cm



Code 0901068
 Code 0901153

C

Distributed by: J. S. Woodhouse Co., Inc.
 1314 Union St
 West Springfield, MA 01089

Phone: 413-739-5607
 Fax: 413-732-3786
 email: info@jswoodhouse.com
 website: www.jswoodhouse.com