

FERRI[®]

Boom mowers for agriculture
and green areas light green
maintenance

T250A **T320A**



T250A

T320A

The new serie of hydraulic flail mowers T250A, T320A and T320A/R for reversible drive, is the result of a deep restyling that has improved functionality and performance.

These new models are particularly suitable as entry-level range for the market dedicated to farms of medium size and to maintenance of green spaces.

These small size and compact models are particularly suitable for small tractors.

T320A/R



Suitable for tractors with reversible drive.

Boom mowers for agriculture and green areas light green maintenance



Drop forged parts for arm linkages.



Circular section of the arms High Torsion Resistance.



Mechanical breaker


FERRI®



T250A

T320A

T320A/R



way.



Classic, cable controls.

OPTIONAL



Electra Full, monolever electric control with rotor's electric switch.



Oil cooler with thermostat.

IMPLEMENTS



Cutter bar.

Boom mowers for agriculture and green areas light green maintenance



| Technical data | | T250A | T320A | T320A/R |
|-----------------------|---------|--------------|--------------|--------------|
| Flailhead | | TME60 | TME80 | TME80 |
| Max horizontal reach* | ft | 8'3" | 10'7" | 10'7" |
| 3 Points linkage | Cat. | I - II | I - II | I - II |
| Weight with Flailhead | lbs | 749 | 816 | 816 |
| Oil | gal | 15.8 | 15.8 | 15.8 |
| P.t.o. | MAX Rpm | 540 | 540 | 540 |


*Reach measured from tractor centre line to head edge.

| Flailhead | | TME60 | TME80 |
|-------------------------------------|-----------|-----------|-----------|
| Width of cut | in | 24" | 31" |
| Rotor speed | Rpm | 3.200 | 3.200 |
| Blade tip speed | ft/sec | 167' | 167' |
| Flail head angle | | 190° | 190° |
| Weight | lbs | 154 | 176 |
| Power available to the rotor | HP | 20 | 20 |
| Power max to hydraulic motor | HP | 29 | 29 |



Direct Drive


| Working positions (ft) | | | |
|------------------------|----|-------|--------|
| Mod. | | T250A | T320A |
| Flailhead | | TME60 | TME80 |
| A | ft | 8'3" | 10'7" |
| B | ft | 3'8" | 6'11" |
| C | ft | 3'7" | 2'11" |
| D | ft | 5'8" | 6'2" |
| E | ft | 9'4" | 11'11" |
| F | ft | 3'5" | 3'4" |
| G | ft | 4'7" | 5'5" |
| H | ft | 6'8" | 9'1" |
| I | ft | 3'7" | 3'7" |
| M | ft | 2'0" | 2'0" |
| N | ft | 0'11" | 0'11" |

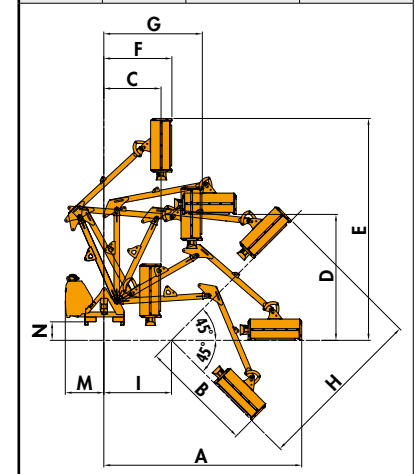

| Tractor | | | | | | | | | |
|----------------|--|----|----|----|----|----|---------------------|--------------------|----------|
| HP/PS | | 20 | 25 | 30 | 35 | 40 | Min. Tractor weight | Min. Tractor width | |
| T250A | | | | | | | | 1543 lbs | 3'3" ft |
| T320A | | | | | | | | 1984 lbs | 3'11" ft |
| T320A/R | | | | | | | | 1984 lbs | 3'11" ft |

| Flails | Flailhead | TME60 | TME80 |
|--|------------|-------|-------|
| Articulated Y blades for: grass, shrubs, bushes, sticks, wood. | Ø max 3/4" | n° 32 | n° 40 |

| Transport dimensions (ft) | | | |
|---------------------------|----|-------|-------|
| Mod. | | T250A | T320A |
| Flailhead | | TME60 | TME80 |
| A | ft | 4'10" | 4'11" |
| B | ft | 2'3" | 2'3" |
| C | ft | 5'1" | 6'4" |



All data subject to change
cambelladv.com 59220 T250A-T320A - USA - EN Rev.1 - 500



FERRI srl
Via Govoni, 30
44034 Tamara (FE) Italy
Tel. +39 0532 866866
Fax +39 0532 866851
info@ferrisrl.it - www.ferrisrl.it



North America Sales and Marketing Manager / FERRI
Kent Zimmerman
Cell (402) 677-3424
k.zimmerman@ferrisrl.it

Parts Stock / FERRI:
J.S. Woodhouse Co., Inc. - 1314 Union Street
P.O. Box 1169 - West Springfield, Ma. 01090 U.S.A.
tel. 413-736-5462 - fax 413-732-3786
info@jswoodhouse.com