



# EOLO-NG AIRBLAST SPRAYER



Technical specifications

## PUMP AND CONTROL

- Type Diaphragms
- Model IDS-2001
- Flow rate 49 gpm
- Highest pressure 725 psi
- Control 2 ways, mechanical
- Pressure gauge Glycerine

## IMPELLER AND NOZZLES


- Diameter 40"
- Propeller 10 blades with clutch
- Channels 2 + turbo
- Gearbox 2 speeds + neutral point
- Highest flow rate 66.215 cfm
- Maximum height 52 ft
- Power consumption 82 hp
- Number of nozzles 38

## TANK AND FILTER

- Capacity 528, 793 and 1057 gal
- Self-cleaning tank 10% out of the main tank
- Sanitary water tank 4 gal
- Material High density polyethylene
- Agitator Hydraulic
- 2 Filters Suction and high pressure

## TRACTOR'S REQUIREMENTS

- Speed of the PTO 540 rpm maximum
- Coupling to the tractor Eye tow bar and PTO shaft
- Tractor minimal power 95 hp

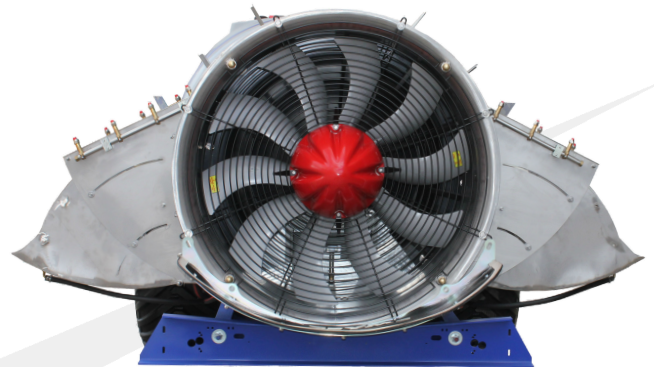

\*This model has available complements and other furnishings in option



[www.teyme.es](http://www.teyme.es)