

SPECIFICATIONS



50 YEARS
OF EXPERTISE
TO SHARE

MODELS	B48C	B54C	B64C	B74C	B84A	B94A
Recommended horsepower HP at PTO	15 to 30	20 to 40	20 to 40	30 to 45	45 to 75	50 to 75
Cutting width - in. (cm)	48 (122)	54 (137)	64 (162)	74 (188)	84 (213)	94 (239)
Cutting height - in. (cm)	24 3/4 (63)	26 (66)	26 (66)	26 (66)	34 (86)	34 (86)
Fan diameter - in. (cm)	20 (51)	24 (61)	24 (61)	24 (61)	28 (71)	28 (71)
Fan width - in. (cm)	6 (15)	7 (17)	7 (17)	9 (23)	10 1/2 (27)	10 1/2 (27)
Shaft diameter - in. (cm)	1 (2.5)	1 3/8 (3.5)	1 3/8 (3.5)	1 3/8 (3.5)	1 9/16 (4)	1 9/16 (4)
Number of blades	4	4	4	4	4	4
Auger diameter - in. (cm)	15 (38)	15 (38)	15 (38)	15 (38)	20 (51)	20 (51)
Auger drive chain	50	60	60	60	60H	60H
Chain idler manual	std	std	std	std	std	std
Deflector adjustment - manual	std	std	std	std	std	std
Non-replaceable high carbon steel cutting edge	✓	✓	✓	✓	✓	✓
Replaceable and adjustable to 3 positions high carbon steel skid shoes	✓	✓	✓	✓	✓	✓
3 point hitch category	1	1	1	1 & 2	1 & 2	2
3 point ASAE quick hitch compatible	1	1	1	1	1 & 2	2
Driveline standard	20	40	40	40	50	60
Parking stand	std	std	std	std	std	Std
Approx. shipping weight - lb (kg)	422 (191)	514 (233)	533 (242)	666 (302)	1132 (513)	1173 (532)
Approx. operational weight with hydr. rotation and deflection - lb (kg)	420 (190)	512 (232)	531 (241)	664 (301)	1190 (540)	1231 (558)

SNOWBLOWERS

AGRICULTURAL



ADJUSTABLE SKID SHOES



PTO PROTECTION

Distributor



Intertek

Manufactured by:

RADTECH INNOVATION
Division of RAD TECHNOLOGIES INC.
2835, Chemin de l'Aéroport
Thetford Mines (Quebec) Canada G6G 5R7
☎ 418 338-4499 | 1 800 338-1615
✉ 418 338-6090 | radtech@radinter.com

BLIZZARD

INNOVATION, OUR PASSION


www.radinter.com

THE BEST CHOICE

For small or large areas, you won't be disappointed by the performance of Blizzard snowblowers. We offer a range of snowblower models width from 48 inches to 94 inches that can fit 15 to 75 horsepower compact tractors.

Reliable and lightweight, our snowblowers allows great maneuverability and are designed for small and agricultural tractors. Moreover, the chute and the housing of our snowblowers are made of top quality steel.

MODELS B48C | B54C | B64C | B74C

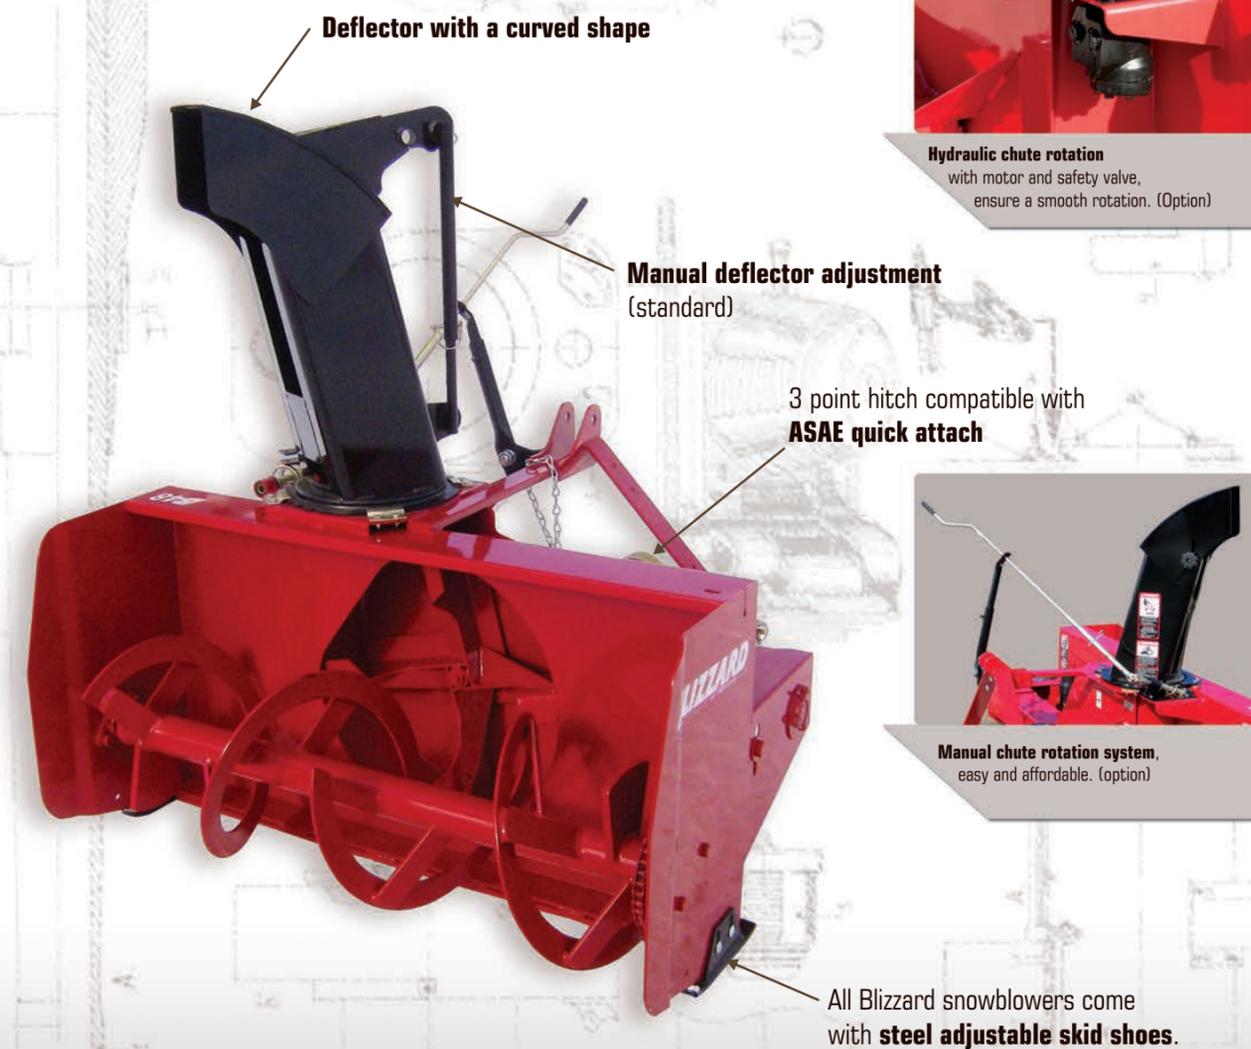


Hydraulic chute rotation with motor and safety valve, ensure a smooth rotation. (Option)



Manual chute rotation system, easy and affordable. (option)


MODELS B84A | B94A

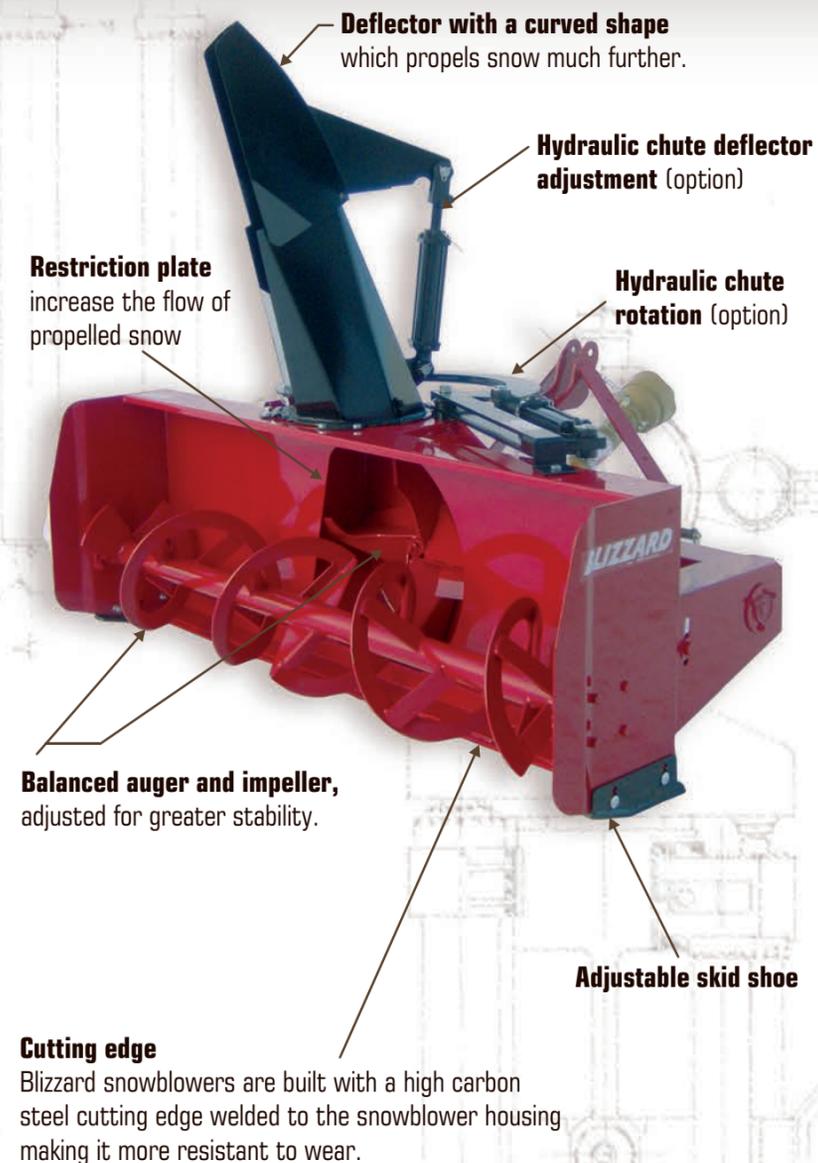

Parking stand, useful for storage, standard on all Blizzard snowblowers.



Drive chain | Blizzard snowblowers have an easily accessible manual chain idler on the side of the snowblower housing for quick adjustment.

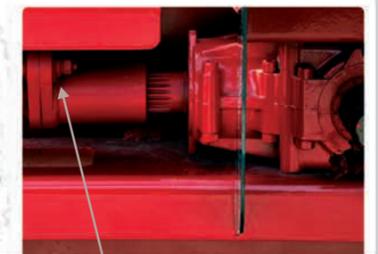

Shear bolt protection on the drive shaft to prevent costly repairs.

SUPERIOR QUALITY COMPONENTS!

Quality is not an option: when we build our snowblowers we always use the best components on the market to ensure longer life and reliability of all our products.