

FERRI[®]

Flail heads for mini-loaders



TSKID

moter



55÷100 HP




14,5-25 Gal/min



Ø max 2"



Flail heads for mini-loaders

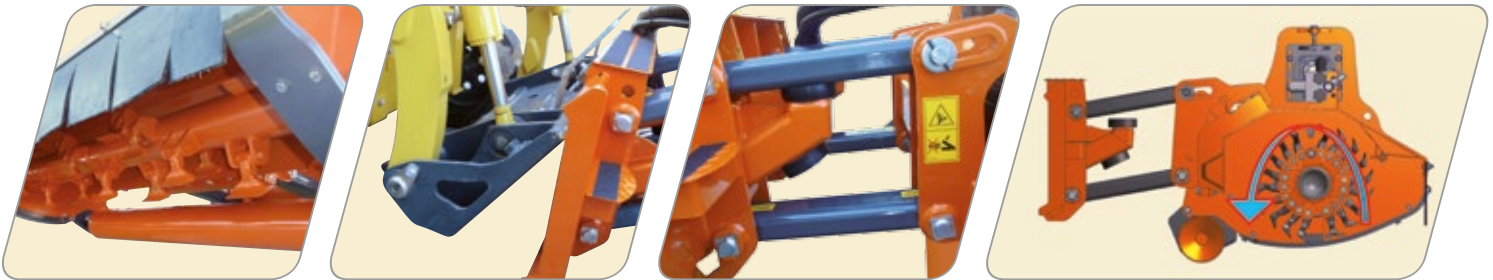

Equipment:

- Unidirectional motor (with drainage)
- Parallel linkage for better floating on uneven grounds
- Linkage (SAE J2513) with self-levelling device
- Mechanical side shift
- Anti-shock + anticavitation valve
- Steel adjusting valve complete with pipes
- "Overlap" rotor
- Hydraulic pipes and connections protected by spiral
- Belts transmission
- Adjustable skids with replaceable wear proof plates
- Rear adjustable roller Ø 6"1/2
- Counterblade
- Rubber and abrasion resistant guard

Option:

- Side shift with hydraulic cylinder complete with pipes

Model	inches	inches	pounds	Gal min÷max	PSI	n.	n.
TSKID1600	63"	74"	1570	14,5÷18,5	2755-3045	16	48
TSKID1800	71"	81"	1650	17,0÷21,0	2755-3045	18	54
TSKID2000	79"	89"	1720	20,0÷25,0	2755-3045	20	60

Flails					
Interchangeable on the same rotor			TSKID 1600	TSKID 1800	TSKID 2000
Cod. 0901196 Hammer for: wood and shrubs	Ø max 2"		n° 16	n° 18	n° 20
Cod. 0901146 Multiuse flails for: grass, bushes, shrubs, sticks, wood	Ø max 1"1/2		n° 48	n° 54	n° 60

www.ferri-america.com



FERRI srl
Via Govoni, 30
44034 Tamara (FE) Italy
Tel. +39 0532 866866
Fax +39 0532 866851
info@ferrisrl.it - www.ferrisrl.it



North America Sales and Marketing Manager / FERRI
Ronald E. Roglis
Glenarm, Illinois 62536
Cell (314) 422-9460
Fax (217) 483-4123
E-mail: ron.roglis@gmail.com

Parts Stock / FERRI:
J.S. Woodhouse Co., Inc.
1314 Union Street
P.O. Box 1169
West Springfield, Ma. 01090 U.S.A.
tel. 413-736-5462
fax 413-732-3786
info@jswoodhouse.com