






Pendulum Spreaders



Model PDC 400 3 Point Hitch

- Category 1, three point hitch, 540 rpm PTO
- Corrosion proof poly hopper
- Pendulum style spreading mechanism
- Precise spreading rate adjustment
- Spreading widths from 27' to 50' with standard spout**
- Spreading rates from 20 to 900 lbs. per acre
- Optional spreading spouts for narrow widths or banding

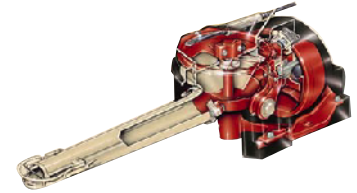

PDV Series Large Capacity Models 3 Point Hitch

- Category 1 & 2, three point hitch, 540 rpm PTO
- Corrosion proof molded plastic hopper
- Pendulum style spreading mechanism
- Precise spreading rate adjustment
- Spreading widths from 27' to 50' with standard spout
- Spreading rates from 20 to 900 lbs. per acre



SPECIFICATIONS						
Models	PDC400C	PDV500	PDV600	PDHV800	PDHV1000	PDHV1200
Capacity (lbs.)	925	1155	1450	2000	2650	2800
Capacity (cu. ft.)	13	17	20.5	30	37	44
Capacity (bushel)	11	13	16	24	29	35
Overall Height	46"	36"	39"	38"	42"	47"
Overall Width	46"	54"	54"	74"	74"	74"
Spreading With**	27' to 50"	27' to 50"	27' to 50"	27' to 50"	27' to 50"	27' to 50"
Weight (lbs.)	221	287	313	375	398	430
Hopper Extension	base model	base model	PDV500 + extension	base model	PDHV800 + extension	PDHV800 + extension

Specifications subject to change without notice.

Distributed by ~



J.S. Woodhouse Co., Inc.

P.O. Box 1169, West Springfield, MA 01090

Tel. 413.736.5462 • Fax 413.732.3786

email: info@jswoodhouse.com • www.jswoodhouse.com