


HOW TO CHANGE THE MECHANICAL CONTROL FOR THE ELECTRICAL CONTROL

1. First step, disconnect the two hoses of the pressure filter. Then remove the dark protection until find the connections and disconnect the three hoses. The junction must keep with the hoses that connect to the control.



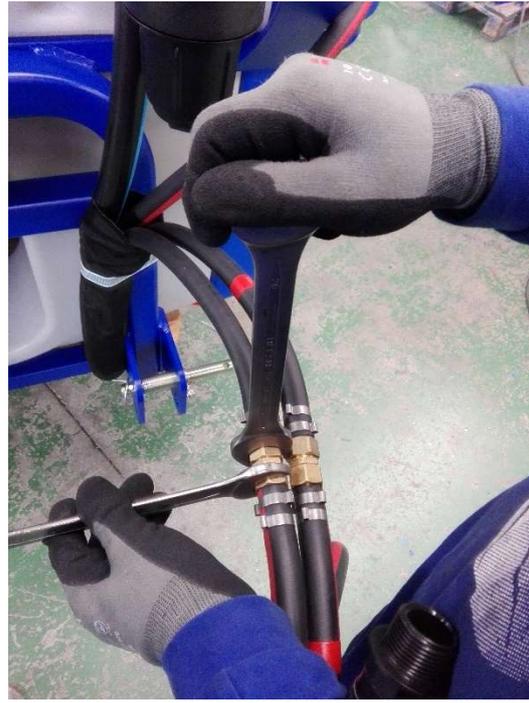

2. Then remove the pressure filter (you can save like spare part) and its holder. Save the screws of the holder, you'll need for the electrical control holder.



3. Now fix the electro valves kit with the screws of the filter holder in the same position as the picture.



4. Then, remove the stopper of the connection of the tank and connect the transparent hose of the electrical control kit as the picture.



5. Then, connect the two small hoses as the picture. Important! **The hose with the red mark must go to the right way!** The hose with the elbow connection goes as the picture.



6. To finish, connect the cables of the electric control and test that the controls are opening the correct sides of the spraying.

