




Tebben Enterprises - 10009 Highway 7 SE - Clara City, Minnesota 56222

AUTOMATIC RESET DEEP TILL


Tebben Deep Tills feature automatic resets and parabolic shanks. Working widths range from 7'-6" to 27'-6" depending on model. Working depth up to 18" to eliminate hard pan and plow sole. Shank spacing's of 15", 24", and 30" depending on model. Available models in 3 point and pull type configurations.



HOW THE AUTOMATIC RESET LEAF SPRING WORKS

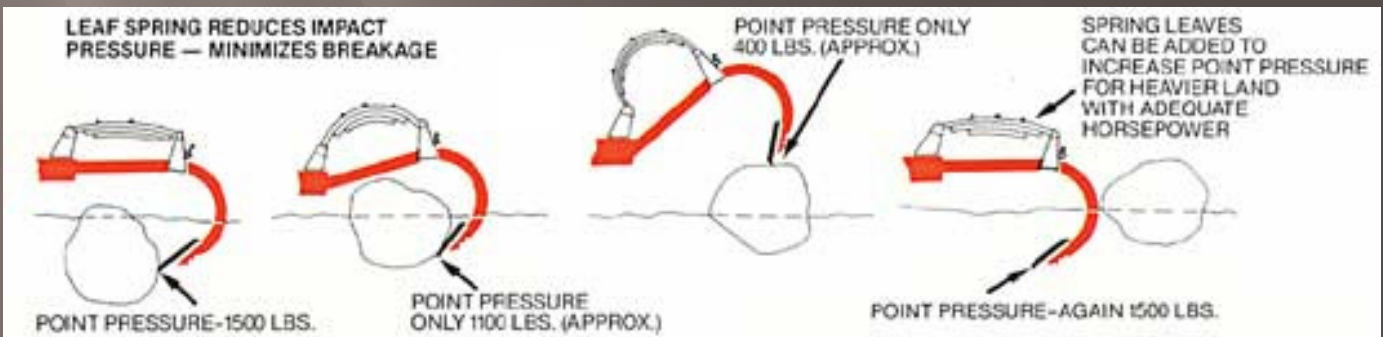

SINGLE RANK DEEP TILL FRAME THREE POINT MOUNTED ONLY

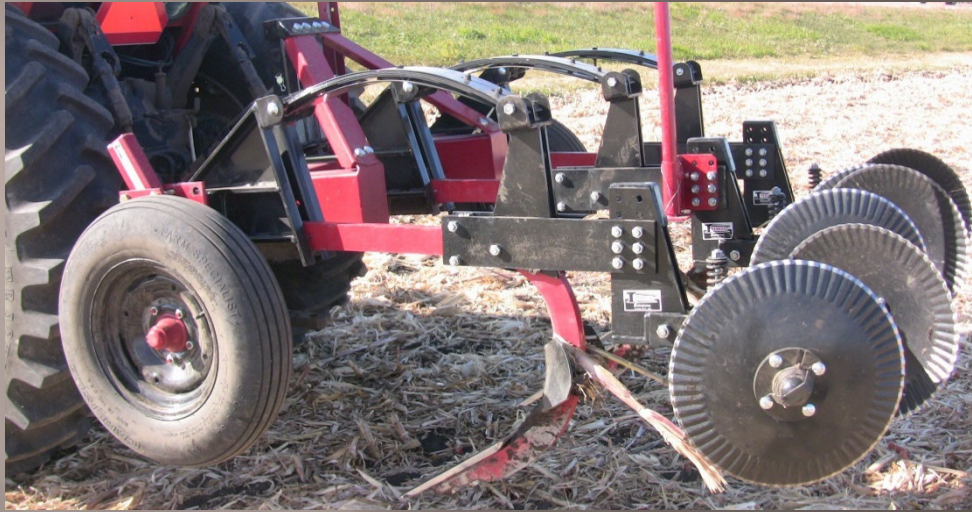

Model	Working Width	Shank Spacing	Hitch	Shanks	Gauge Wheels	Min. HP	Weight Lbs
DT3S-30	7'-6"	30"	Cat 2 & 3	3	2 Manual	75	1038
DT5S-30	12'-6"	30"	Cat 2 & 3	5	2 Manual	125	1502
DT7S-30	17'-6"	30"	Cat 2 & 3	7	2 Manual	175	2078

FRAME TYPE DEEP TILL THREE POINT MOUNTED ONLY



Model	Working Width	Shank Spacing	Hitch	Shanks	Gauge Wheels	Min. HP	Weight Lbs
DT5M-30	12'-6"	30"	Cat 2 & 3	5	2 Manual	125	2208
DT7M-24	14'	24"	Cat 2 & 3	7	2 Manual	175	2880
DT7M-24 WD	14'	24"	Cat 2 & 3	7	2 Manual	175	2680

FRAME TYPE DEEP TILL PULL TYPE ONLY



Model	Working Width	Shank Spacing	Hitch	Shanks	Gauge Wheels	Min HP	Weight Lbs
DT5-30	12'-6"	30"	Pull Type	5	2 Hyd	125	2562
DT7-30	17'-6"	30"	Pull Type	7	4 Hyd	175	3856
DT9-30	22'-6"	30"	Pull Type	9	4 Hyd	225	4648
DT11-30	27'-6"	30"	Pull Type	11	4 Hyd	275	5439
DT7-15	8'-9"	15"	Pull Type	7	2 Hyd	175	2980
DT9-15	11'-3"	15"	Pull Type	9	2 Hyd	225	3462
DT11-15	13'-9"	15"	Pull Type	11	2 Hyd	275	3952
DT13-15	16'-3"	15"	Pull Type	13	4 Hyd	325	5346
DT15-15	18'-9"	15"	Pull Type	15	4 Hyd	375	6073
DT17-15	21'-3"	15"	Pull Type	17	4 Hyd	425	6563
DT19-15	23'-9"	15"	Pull Type	19	4 Hyd	475	6981

TEBBEN DEEP TILL OPTIONAL EQUIPMENT



PART NUMBER	DESCRIPTION	APPROX WEIGHT LBS
TM76-00-118	Helper Leaf Spring(up to 4 can be added per shank for approximately 200lb point pressure each)	5
TM76-00-178	Coverboard	8
TM76-197	Shank Wear Plate(cannot be used with coverboard)	9
TM76-977	7" Lifter Point	4
TM76-978	13" Lifter Point	6
TC95-100	Disc Leveler Assembly	150