



Designed. Engineered. Remarkable Value.

Versatile 3-pt. Rear Tractor Blades and Landscape Rakes

**3-pt. Mounted Attachments For Handling
Your Routine Maintenance With Ease**



www.worksaver.com

Engineered, Designed and Manufactured in the USA

Worksaver



Rugged Rear Blades — for the Tough Jobs!




Rear Blade Options

Skid Shoes

- Remove Snow
- Level Gravel
- Clean Feedlots or Barns
- Reduce Blade Damage
- Increase Blade Life
- Prevent Gouging


Snow removal and farm cleanup have fewer surprises when skid shoes are attached to the rear blade. No more guessing blade height each time you lower the blade. Skid shoes provide adjustable clearance to travel over uneven surfaces that can damage the blade. They also help prevent damage to the blade when used in cleaning level surfaces, simplifying operations on driveways, barn floors and feedlots.



SKID SHOES FOR REAR BLADES		
Model	SK-5	SK-8
Number	343435	346745
Used On	MCRB/RB Series	RBHD Series

End Plates

Material handling is easier when you install rear blade end plates. Quickly gather and efficiently move dirt, gravel, slurry or manure to more desirable locations.



END PLATES FOR REAR BLADES	
Model	EP-40
Number	346765
Used On	RBHD Series
Weight	44 lbs.

Simple yet rugged design is used in these value-priced blades. Designed for tractors up to 25 hp, the DC-Series offers mechanical angle adjustment only. The moldboard utilizes a 3/8" x 3" welded cutting edge. An all-welded A-frame is matched to the blades horsepower requirements. Shipped with 7/8" Cat. 1 pins (5/8" Cat. 0 pins available).

DC-Series Blades

	DC-4	DC-5
Item No.	345600	345500
Maximum hp	25 hp	25 hp
Frame Size	3" x 1.5"	3" x 1.5"
A-Frame	Formed Channel	Formed Channel
3-pt. Hitch	Welded Straps	Welded Straps
Moldboard Width	Cat. 0/1	Cat. 0/1
Moldboard Height	4'	5'
Moldboard Thickness	10"	10"
Cutting Edge — Welded	3/16"	3/16"
Angle/Pivot	3/8" x 3"	3/8" x 3"
Angle Forward (degrees)	360°	360°
Angle Reverse (degrees)	0, 15, 30	0, 15, 30
Offset	0, 15, 30	0, 15, 30
Tilt	N/A	N/A
Parking Stand	N/A	N/A
Weight	N/A	N/A
	114 lbs.	126 lbs.



MCRB-72

An economical 6' blade for tractors up to 35 hp, with Cat. 1 3-pt. hitch. The MCRB-72 only offers mechanical angle adjustment. The main frame is formed with 3" x 2.5" channel; replaceable straps are used for the A-frame. The formed moldboard includes a 1/2" x 6" reversible cutting edge.

MCRB-72	
Item No.	346775
Maximum hp	35 hp
Frame Size	3" x 2.5"
A-Frame	Formed Channel
3-pt. Hitch	Bolted Straps
Moldboard Width	Cat. 1
Moldboard Height	6'
Moldboard Thickness	12"
Cutting Edge — Reversible	1/4"
Angle/Pivot	1/2" x 6"
Angle Forward (degrees)	360°
Angle Reverse (degrees)	0, 15, 30
Offset	0, 15
Tilt	N/A
Parking Stand	N/A
Weight	186 lbs.
Optional Item	
SK-5 Skid Shoes	Yes




RB-Series Standard Rear Blades

	RB-1272	RB-1284
Item No.	346705	346715
Maximum hp	40 hp	40 hp
Frame Size	3" x 3"	3" x 3"
A-Frame	Welded Mast	Welded Mast
3-pt. Hitch	Cat. I	Cat. I
Moldboard Width	6'	7'
Moldboard Height	12"	12"
Moldboard Thickness	1/4"	1/4"
Cutting Edge — Reversible	1/2" x 6"	1/2" x 6"
Angle/Pivot	360°	360°
Angle Forward (degrees)	0, 15, 30	0, 15, 30
Angle Reverse (degrees)	0, 15	0, 15
Offset	12" R/L	12" R/L
Tilt	N/A	N/A
Parking Stand	Standard	Standard
Weight	190 lbs.	206 lbs.
Optional Item		
SK-5 Skid Shoes	Yes	Yes

Designed for Cat. I or Cat. I Quick Hitch these standard duty blades are ideal for the small acreage owner. The main frame consist of an all welded mast and 3" x 3" square tubing. The RB-Series features mechanical offset and angle adjustment. Angle adjustment is done by simply removing a pin, angling the blade and reinstalling the pin. All models have a reversible cutting edge and are supplied with a parking stand for convenient storage. Available as an option are skid shoes to assist in cutting height adjustment to reduce the chance of surface damage during snow removal.

RBHD-Series Heavy Duty Rear Blades




Designed for Cat. I or Cat. I Quick Hitch these heavy-duty models have the strength required to handle the tough jobs. The main frame consist of an all welded mast and 4" x 4" square tubing. The RBHD-Series features mechanical offset and angle adjustment. Angle adjustment is done by simply removing a pin, angling the blade and reinstalling the pin. The RBHD-6-T and RBHD-7-T utilize a 3-position tilt assembly that is easy to use. All models have a reversible cutting edge and are supplied with a parking stand for convenient storage. Available options are skid shoes to assist in cutting height adjustment to reduce the chance of surface damage during snow removal. Optional end plates provide a boxed area for grading.


	RBHD-6	RBHD-7	RBHD-6-T	RBHD-7-T
Item No.	346780	346785	346790	346795
Maximum hp	50 hp	50 hp	50 hp	50 hp
Frame Size	4" x 4"	4" x 4"	4" x 4"	4" x 4"
A-Frame	Welded Mast	Welded Mast	Welded Mast	Welded Mast
3-pt. Hitch	Cat. I	Cat. I	Cat. I	Cat. I
Moldboard Width	6'	7'	6'	7'
Moldboard Height	14"	14"	14"	14"
Moldboard Thickness	1/4"	1/4"	1/4"	1/4"
Cutting Edge — Reversible	1/2" x 6"	1/2" x 6"	1/2" x 6"	1/2" x 6"
Angle/Pivot	360°	360°	360°	360°
Angle Forward (degrees)	0, 15, 30	0, 15, 30	0, 15, 30	0, 15, 30
Angle Reverse (degrees)	0, 15	0, 15	0, 15	0, 15
Offset	12" R/L	12" R/L	12" R/L	12" R/L
Tilt	N/A	N/A	3-position	3-position
Parking Stand	Standard	Standard	Standard	Standard
Weight	275 lbs.	299 lbs.	288 lbs.	309 lbs.
Optional Items				
SK-8 Skid Shoes	Yes	Yes	Yes	Yes
EP-40 End Plates	Yes	Yes	Yes	Yes

Landscape Rakes

LRHD-6 (Shown with optional gauge wheels)



LRHD-6

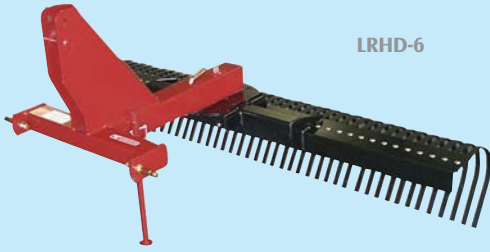

Ideal for grading, leveling, spreading topsoil, removing stones as well as maintaining ball diamonds and horse exercise arenas. All units utilize 5/16" x 1" x 15" heat treated spring steel tines which are individually bolted to the tine bar and supported by a "waffle plate" for added strength. Select models (LRHD) will fit a Cat. I quick hitch and are supplied with a parking stand. All models are shipped with 7/8" pins.

	DCR-4	DCR-5	MCR-6	MCR-7	LRHD-6	LRHD-7	LRHD-8
Item No.	341700	341710	341890	341880	342240	342250	342255
Maximum hp	25 hp	25 hp	40 hp	40 hp	60 hp	60 hp	60 hp
Frame Size	3" x 1.5" Formed Channel	3" x 1.5" Formed Channel	3" x 2.5" Formed Channel	3" x 2.5" Formed Channel	4" x 4" Sq. Tube	4" x 4" Sq. Tube	4" x 4" Sq. Tube
A-Frame	Welded Straps	Welded Straps	Welded Straps	Welded Straps	Welded Mast	Welded Mast	Welded Mast
3-pt. Hitch	Cat. 0/I	Cat. 0/I	Cat. I	Cat. I	Cat. I	Cat. I	Cat. I
Rake Width	4'	5'	6'	7'	6'	7'	8'
Tine Bar Size	3.5" x 2.5"	3.5" x 2.5"	3.5" x 2.5"	3.5" x 2.5"	6" x 3.5"	6" x 3.5"	6" x 3.5"
Rake Positions	3 forward 2 reverse	3 forward 2 reverse	3 forward 2 reverse	3 forward 2 reverse	3 forward 2 reverse	3 forward 2 reverse	3 forward 2 reverse
Tine Size	5/16" x 1"	5/16" x 1"	5/16" x 1"	5/16" x 1"	5/16" x 1"	5/16" x 1"	5/16" x 1"
Weight	124 lbs.	134 lbs.	187 lbs.	199 lbs.	279 lbs.	305 lbs.	331 lbs.
Parking Stand	N/A	N/A	N/A	N/A	Yes	Yes	Yes
Optional Gauge Wheel Kits							
SGW-10	Opt.	Opt.	Opt.	N/A	N/A	N/A	N/A
DGW-20	N/A	N/A	Opt.	Opt.	Opt.	Opt.	Opt.



Caution — A heavy load can cause your tractor to tip over. When moving heavy loads, keep the load as close to the ground as possible, go slowly around turns, and be sure the front or rear of tractor is properly counterbalanced with weights.

Caution — Operators must read & understand operator's manual, particularly the safety warnings and instructions. **The operator is responsible for safety of themselves and others when operating equipment.**



WORKSAVER, INC. has a corporate policy of continuous product improvement and development; therefore, specifications are subject to change without any advance notice.

WORKSAVER, INC. is not responsible for differences between specifications or illustrations contained in this publication and the actual equipment.



Distributed by:



WorkSaver, Inc.

P.O. Box 100, Litchfield, IL 62056-0100

Phone: 217-324-5973 • Fax: 217-324-3356

www.worksaver.com • E-mail: sales@worksaver.com

Designed. Engineered. Remarkable Value.